

HDR200 SERIES TECHNICAL DATA SHEET



| MODELS | INDICATIVE RANGE | UPDATE RATE |
|---------------|------------------|-------------|
| HDR292 | 1,000 metres | 2 Hz |
| HDR282 | 800 metres | 2 Hz |
| HDR252 | 500 metres | 2 Hz |


DIMENSIONS

Measurements

H575mm x W332mm

Weight

14 kg

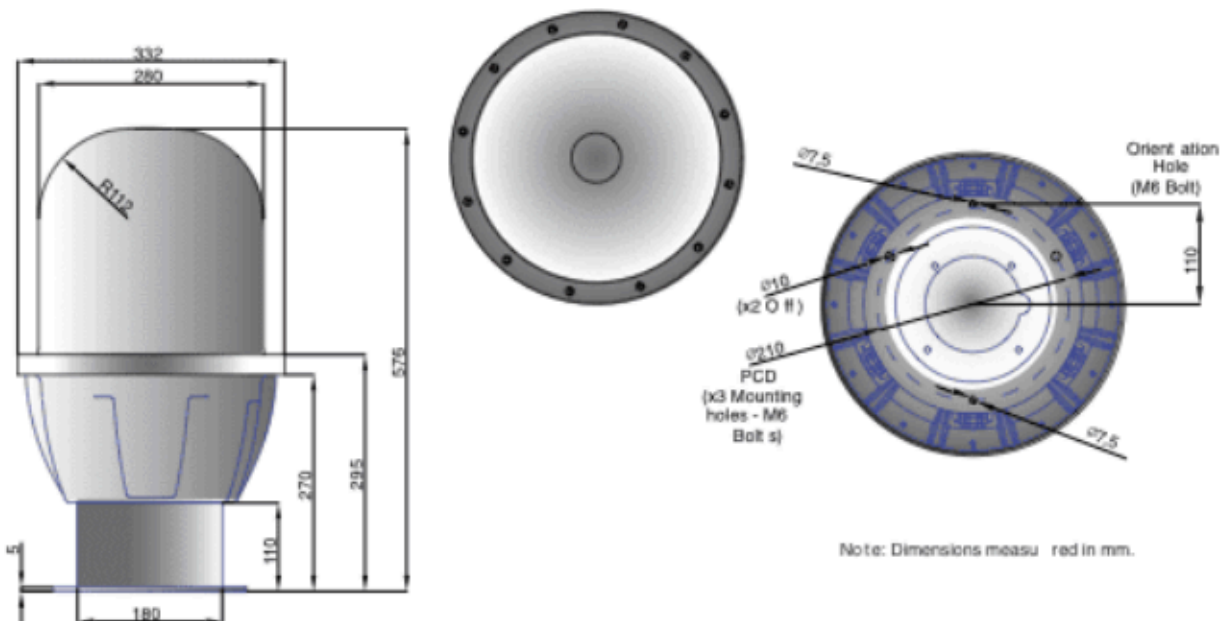

Note: Dimensions measured in mm.

Specifications are subject to change without notice.
All images used are for illustrative purposes only.
Due to customer use beyond our control, Navtech Radar cannot assess product relevance for specific applications. Customers are responsible for testing products and reviewing regulations to ensure safe operation.

Navtech complies with the following ISO standards




ISO 9001:2015 Quality
ISO 27001 Information Security
ISO 20000 IT Service Management

ISO 45001 Health and Safety
ISO 14001 Environmental

Navtech Radar

+44 (0) 1235 832 419

www.navtechradar.com



Safety is everything.

TECHNICAL SPECIFICATIONS - HDR200 Series

| | |
|--|---|
| Operating Frequency | 76 - 77 GHz |
| Operating Range | 5-1000m Person 5-1000m Vehicle |
| Range Resolution | HDR292 : 0.175m HDR282 : 0.175m HDR252 : 0.175m |
| Azimuth Beamwidth | 1.8° |
| Elevation Beamwidth | 4° |
| Infill Elevation Beam | Optional |
| Measurement Rate | 400 per rotation |
| Field of View | 360° |
| Update Rate (Rotation Speed) | 0.5s (2 Hz) |
| Data Connection | 1 Gbps Ethernet |
| Power Consumption | 24 Watts |
| Power Supply | 24 Volts DC |
| Mounting Height | HDR292 : 3-6m HDR282 : 2-4m HDR252 : 2-4m |
| Safe Working Distance (from radome) | 0.1m |
| Operating Temperature | -20°C to + 60°C |
| Environmental | UL50/50E IP 67 BS EN 60068-2-52:1996 Test Kb Severity 3 |
| Compliance | CE, UKCA , ACMA, FCC Marked |
| EMC Directive | 2014/30/EU |
| Low Voltage Directive | 2014/35/EU |
| Radio Equipment Directive | 2014/53/EU |

Specifications are subject to change without notice.
All images used are for illustrative purposes only.
Due to customer use beyond our control, Navtech Radar cannot assess product relevance for specific applications. Customers are responsible for testing products and reviewing regulations to ensure safe operation.

Navtech Radar



+44 (0) 1235 832 419



www.navtechradar.com



Safety is everything.

AG-PM-0002 V2.0